



MoreLite Inc
23775 Commerce Park Suite 5,
Beachwood, OH 44122
Website: www.moreliteusa.com
info@moreliteusa.com
Ph: 216-340-0008

S M A R T H O M E S O L U T I O N



MoreLite™





UNLOCK TOMORROW: SECURITY AT YOUR PALM

PALM VEIN RECOGNITION WI-FI SMART DEADBOLT

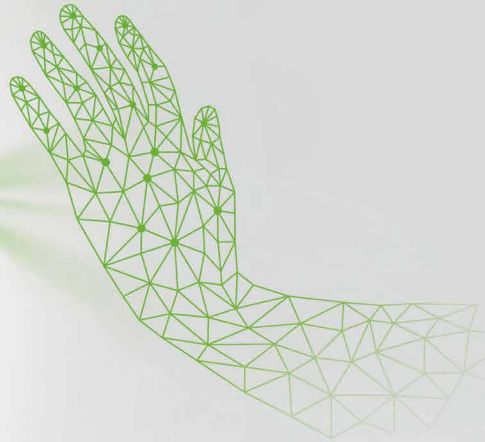

MLSL-
KD10 PRO



Next-Level Security

- Uncopiable Palm Vein Technology
- Anti-Hijacking Alert • Tamper Alarm



6-in-1 Convenience

- 6 Unlock Options: Palm Vein, Fingerprint, Passwords, App Control, Voice Control, Mechanical Keys



Pro Battery Life



- Up to 9-Month Power Per Charge - 10 unlocks per day
- Quick-Release Charging • Low Battery Warning Below 20%

- Unlocking methods:
 - Palm vein unlock
 - Fingerprint unlock
 - Password unlock
 - App remote unlock
 - Voice unlock
 - Key unlock
- Security Features:
 - Anti-Hijacking alarm
 - Tamper alarm
 - Abnormal unlock alert
 - Low battery alert
 - Real-Time activity notifications
 - Support temporary passcodes
 - Virtual password defense

- Dimensions(front): 157.2 x 70.2 x 36.5 mm
- Battery: 10000mAh rechargeable battery
- Connectivity: 2.4GHz Wi-Fi only (802.11b/g/n)
- Palm vein capacity: 50
- Password capacity: 50

SMART KNOB LOCK

4 WAYS TO UNLOCK,
RECHARGEABLE BATTERY

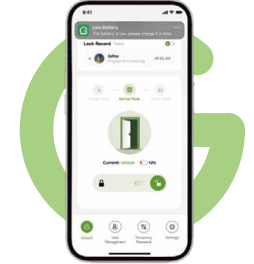

- Unlock methods
 - Fingerprint unlock
 - Password unlock
 - App unlock via Bluetooth
 - Backup key unlock
- Fingerprint capacity: 100
- Password capacity: 50
- Waterproof rating: IP54
- Chip: AI self-learning
- Battery: 500mAh@3.7V rechargeable lithium battery

SMART KNOB LOCK

4 WAYS TO UNLOCK,
RECHARGEABLE BATTERY



- Unlock methods:
 - Fingerprint unlock
 - Password unlock
 - App unlock via Bluetooth
 - Key unlock
- Product dimensions: 76 x 82 mm
- Power supply: 4 x AAA batteries
- Waterproof rating: IP54
- Door thickness compatibility: 35-55 mm
- Fingerprint capacity: 18
- Password capacity : 20
- Voice prompt: Buzzing notification

SMART ELECTRICAL PRODUCTS



Device Sharing



Energy Monitoring



Voice Control



Remote Control



Time Schedule



V0
Anti Fire Material



MLSP-WP3 Wi-Fi Smart Plug US

- Voltage: 120V • Max. output: 10A
- Rated power: 1200W
- Connectivity: Wi-Fi+BLE
- Certification: FCC, ETL



MLSP-WP6 Wi-Fi Smart Plug US


- Voltage: 120V • Max. output: 15A
- Rated power: 1800W
- Connectivity: Wi-Fi+BLE
- Certification: FCC



MLSP-WP2 Wi-Fi Smart Plug US

- Voltage: 120V • Max. output: 10A
- Rated power: 1200W • Connectivity: Wi-Fi
- Network: 802.11 b/g/n, 2.4Ghz
- Certification: FCC, ETL





SMART POWER STRIP



Device Sharing



Voice Control



Remote Control



Time Schedule



V0
Anti Fire Material



MLSPS-P2 Wi-Fi Smart Power Strip US

- Input: 120V · Max. output: 15A
- Rated power: 1800W
- USB ports: 5V/3.1A
- Connectivity: Wi-Fi+BLE
- Certification: FCC certified



MLSPS-WP12 Wi-Fi Smart Power Strip US


- Input voltage: 120V · Max. output: 15A
- Rated power: 1800W · Fast charging: 30W
- AC socket outputs: 6
- USB Ports: 2xUSB A / 1 x Type C fast charging port
- Energy monitoring: Yes



MLSPS-WP9 Wi-Fi Smart Power Strip US

- Voltage: 120V · Max. output: 10A
- USB ports: 5V/3.1A
- Connectivity: Wi-Fi+BLE
- Certification: FCC certified





SMART SWITCH



Device Sharing



Energy Monitoring



Voice Control




Remote Control



Time Schedule



V0
Anti Fire Material

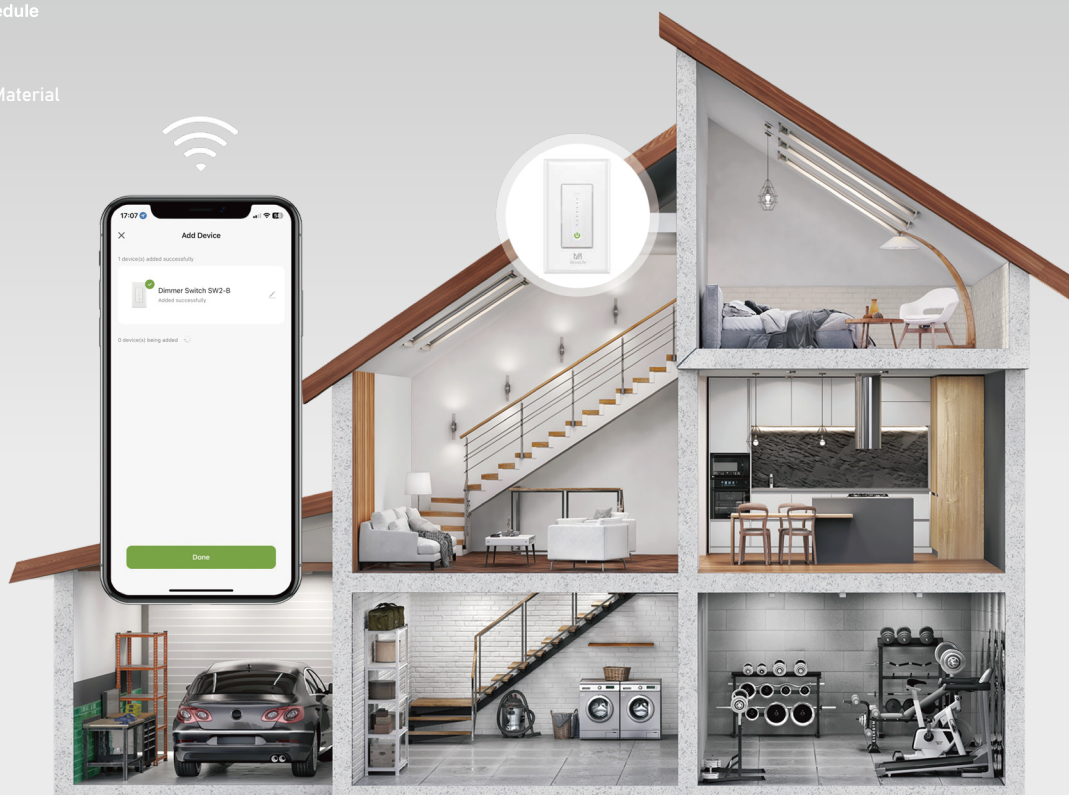

MLSS-SW2 Smart Dimmer Switch US

- Voltage: 120V • Connectivity: Wi-Fi+BLE
- Max. output: - 150W for LED
- 150W for CFL - 400W for Incandescent
- Neutral wire required: Yes • Certification: FCC, UL
- Feature: Fingertip brightness adjustment on switch



MLSS-SW19 Smart Ceiling Fan & Light Dimmer Switch

- Input voltage: 120V ~ 50/60Hz, 4A
- Fan Max. power: 120W • Light Max. power: 400W
- Maximum output: - 150W for LED
- 150W for CFL - 400W for Incandescent bulbs - 1A for ceiling fan
- Operating temp.: -10°C to 40°C (14°F to 104°F)
- FCC ID: 2BGPL-SW19



MLSS-W01 Smart In Wall Outlet US

- Voltage: 120V • Max. output: 15A
- Connectivity: Wi-Fi+BLE
- Neutral wire required: Yes
- Certification: FCC





SMART SENSOR



Temperature & Humidity
Sensor with LCD screen + backlight

MLSTHS-S6 ^{Wi-Fi}
MLSTHS-ST17 ^{Zigbee}



- Battery: LR03-1.5V / 3 × AAA batteries
- Wi-Fi frequency: 2.4GHz IEEE 802.11 b/g/n
- Temperature measurement range: -9.9°C~60°C
- Humidity measurement range: 0%RH~99%RH
- Temperature measurement accuracy: ±1°C
- Humidity measurement accuracy: ±5%RH



Smart Window / Door Contact Sensor

MLSWDS-S2 ^{Wi-Fi}
MLSWDS-ST18 ^{Zigbee}



- Window / Door safeguard
- Instant App notification
- Smart action support
- Easy installation with 3M adhesive

Smart Gate Way

MLSG-G2 ^{Bluetooth / Wi-Fi}
MLSG-ST21 ^{Zigbee}



- Wi-Fi 2.4G+BLE 5.0+Mesh
- Local automation
- No network required

Intelligent Water Leak Sensor

MLSWS-S5 ^{Wi-Fi}
MLSWS-ST19 ^{Zigbee}



- Battery: LR03-1.5V / 2 × AAA (Alkaline Battery)
- Battery life: 6000 triggers · Standby current: 8μA
- Alarm current: 70mA - 120mA
- Standard: IEEE 802.11b/g/n · Wi-Fi: 2.4GHz (only)

Smart Bluetooth
Thermostatic Radiator Valve

MLTRV-STR1



- To achieve accurate temperature management
- Improved comfort and energy savings
- Power: 2 AA battery (Bluetooth)



4G | WI-FI SMART CAMERA



Device Sharing



Smart Floodlight Wi-Fi Camera

MLSC-IPC3



- Video quality: 2K high definition
- Night vision range: 8-10m
- Waterproof rating: IP65
- Lumen output: 800-1000 lm
- Functionality: 3-in-1 (PIR Sensor + Light + Camera)
- Power supply: Power adapter included
- Pixel resolution: 2304 x 1296



Smart Wi-Fi Camera

MLSC-IPC2




- Video quality: 2K high definition
- Night vision range: 30 ft (about 9m)
- Motion detection: Yes, with notifications
- Sound and App alarm: Yes
- Power supply: Power adapter included





SMART LIGHTING

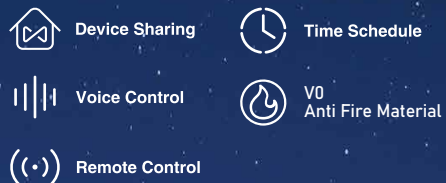

Smart LED Light Bulb MLSB-WB4

- Base type: E26/E27/B22
- Power rating: 9W
- Multiple colors: RGB + CW
- Lumen output: 850lm
- Dimmable color temperature: 2700K ~ 6500K
- Connectivity: Wi-Fi + BLE



Smart Led Candle Light MLSB-WB6



- Voltage: 85-265V • Power: 5W / 450 LM
- Color: RGB + CW • Color Temp.: 2700K - 6500K
- Working Temp.: -25°C to 45°C
- Lamp holder: E14, E12
- Voice assistant: Amazon, Google, Alice, Maruyia



Smart Light Strip 9.2ft/2.8m

MLSLS-SL1

- Length: 9.2ft / 2.8m
- Input voltage: 5V / 1A
- Light color: 16 million RGB dimmable
- Power supply: USB
- Wi-Fi: 2.4GHz (only)



Smart Bedside Lamp LB3

MLS-LB3

- Input: 5V/2A
- Blade color: RGB+W
- Lumen output: 400lm
- Color temperature: 2700K - 3100K
- Wi-Fi: 2.4GHz (only)



Smart Led Ceiling Light

MLSCL-LB12



- Voltage: 85-265V • Color: 24W / 1920LM
- Working Temp.: -25°C to 45°C
- Color Temp.: 2700K - 6500K • Color: RGB + CW
- Voice assistant: Amazon, Google, Alice, Maruyia

